


RAYZR

QUICK START GUIDE - April 2019 V.1

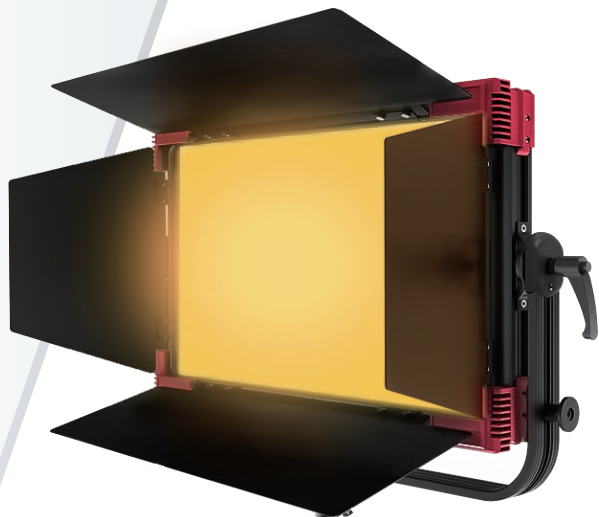

MC 400 Max

Multi-Color LED PANELS


- 1 SETTING UP
- 2 FUNCTIONS
- 3 WHAT IS IN THE BOX

1


SETTING UP

Mounting

- > Mount the light on a light stand with the installed TVMP receptacle. The receptacle offers two ways to mount the light to a light stand.



Position 1

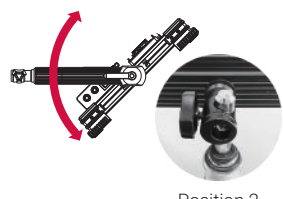

Position 2

Tilting


- > The tilt position of the light can be adjusted by the high strength tilt lock lever, which can be repositioned by pulling and turning it (lift & lock).



Powering

- > The light can be powered by: 1xV-Mount battery / AC adapter through XLR-4 connector.

Power Switch

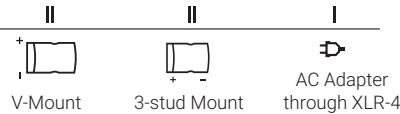

- > **MC 400 Max** ● 14.8 V DC ○ 14.4 V DC ● 36 V, 13.3 A DC

● Standard ○ Optional — Not available

DMX (only models including DMX)

- > Connect a standard DMX console by the XLR 3-pin connector.



Pin 1: Ground Pin 2: Data 1- Pin 3: Data 1+

2

FUNCTIONS

Mode Selection | <MENU> & <↑> <↓>

- > Start in the main menu interface. From other interface pages press <MENU> to return to the main menu.
- > **Select Mode:** Press <↑> <↓> to move the cursor to select the mode or setting menu.
- > **Enter Mode:** Press <MENU> to enter the selected mode or setting interface.

Adjusting Parameters | <Adjustment Knob> & <↑> <↓>

- > Enter a lighting mode or setting interface first:
- > **Select:** Press <↑> <↓> to move the cursor to the parameter of choice.
- > **Adjust:** Turn top <Adjustment Knob> to quickly or bottom <Adjustment Knob> to slowly adjust the selected parameter.

Menu
Confirm / Return



Adjustment Knob Quick

Adjustment Knob Fine

Presets | <MODE> + <1~4> & <1~4>

- > Four scene presets can be saved independently in each mode. Please enter one of the lighting mode operation interfaces first:
- > **Save:** To save the light parameters in the current mode to a preset, press and hold <SAVE> and press one of the preset number buttons <1> <2> <3> <4>.
- > **Recall:** To recall a saved preset in the current mode, press one of the saved preset number buttons <1> <2> <3> <4>.

3

WHAT IS IN THE BOX

RAYZR

MODEL	Rayzr MC 400 Max
Light Body	●
Barndoors	●
AC Adapter & Cable	●

● Standard ○ Optional – Not available

Technical data and offerings are subject to change without notice.